



Lyrschackel PBSB

Utförande: Smidd. Levereras med mutter och sprint.

Material: Seghärkningstål. Bult i legerat stål

Märkning: Max last, CE.

Säkerhetsfaktor: 6:1.

Standard: US.std RR-C-271


Ytbehandling: Varmförzinkad.



Teknisk support

Art.nr	Max last	Pin Ø	a*	c*	d	d ₂	e	Vikt
	ton	d ₁						kg
11.31PBSB00033	0,33	6,5	10	23	5	15	16	0,03
11.31PBSB00050	0,5	8	13	29	6,8	18	20	0,05
11.31PBSB00075	0,75	9,5	14	31	8	21	22	0,10
11.31PBSB00100	1	11	17	37	10	25	26	0,15
11.31PBSB00150	1,5	13	19	43	11	27	30	0,22
11.31PBSB00200	2	16	21	48	13	31	33	0,36
11.31PBSB00325	3,25	19	27	60	16	40	43	0,76
11.31PBSB00475	4,75	22	32	72	19	48	51	1,2
11.31PBSB00650	6,5	25	37	85	22	54	58	1,8
11.31PBSB00850	8,5	28	44	96	27	60	69	2,6
11.31PBSB00950	9,5	32	48	109	29	68	75	3,8
11.31PBSB01200	12	35	53	121	32	76	84	5,3
11.31PBSB01350	13,5	38	59	134	35	84	94	7,2
11.31PBSB01700	17	42	62	149	38	92	99	9,4
11.31PBSB02500	25	50	75	178	45	106	128	15
11.31PBSB03500	35	56	84	197	52	122	148	24
11.31PBSB05500	55	70	107	270	64	145	186	45
11.31PBSB08500	85	80	130	325	76	165	205	70

*Smidestolerans +/- 5%.

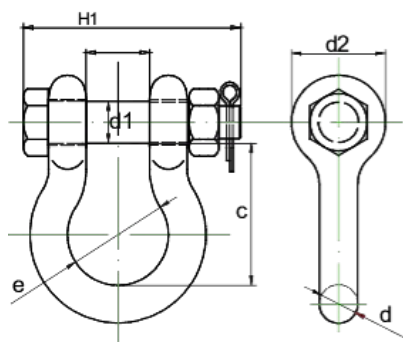

STOCKHOLM
08-758 00 10

GÖTEBORG
031-50 86 50

MALMÖ
040-22 30 40

JÖNKÖPING
036-35 40 80

VARBERG
0340-64 66 40

SKELLEFTEÅ
08-473 54 56

ÖRNSKÖLDSVIK
08-473 54 70