


# HD-SERIES



ENGLISH



Thank you for purchasing the MyWeigh HD Series heavy duty shipping scale. This scale is designed to provide years of accurate weighing. Please read this entire manual before use. If you have any questions about your scale or have troubleshooting concerns, please visit our **website at [www.MyWeigh.com](http://www.MyWeigh.com)**.

## SPECIFICATIONS

Model	HD150	HD300
Capacity	68kg/150lb	136kg/300lb
Accuracy	0.02kg/0.05lb	0.05kg/0.1lb

## POWER SUPPLY

The HD Series scale is designed to run with 6.0V / 100 mA AC power (ac adapter included) or optional 4x AA batteries. The AC adapter plugs into the socket on the rear of the scales weighing indicator. If you want to use batteries, please install them in the battery compartment on the underside of the base of the scale.


### Battery Installation


For battery installation, turn over the scale, you'll see the battery compartment on the underside of the base of the scale, lift and open (see the enclosed drawing Fig1) the battery cover, remove and/or install the batteries. Be sure that the batteries are installed correctly following the polarity indicators in the battery compartment. Reinstall the battery cover.

## OPERATION INSTRUCTIONS

Only operate the scale on a flat, level surface that is stable and durable enough to support the scale and the items being placed on the scale. Either place the remote display box together with the scale on its surface or mount the display box on a wall at a suitable height with the included wall mounting kit.

### Weighing Procedures

Press the  key to turn on the scale, the display will show "150.00lb" for the HD150 shipping scale or "300.0lb" for the HD300 shipping scale. When the display will shows "0.00" the scale is now ready for use. To begin weighing, follow these steps:

1. Press and release the  key to set the scale's zero point. If you press and hold the key, then the scale will be turned off.
2. Press the **[M]** key to change the weighing unit between "lb" and "kg".
3. Press the **[T]** key to TARE or Zero the scale.
4. Press the **[D]** key to transmit the data through the USB port.

## Display Messages

**150.00:** the scales maximum capacity is 150.00lbs, the scale is attempting to locate the proper zero position for accurate weighing.

**300.00:** the scales maximum capacity is 300.00lbs, the scale is attempting to locate the proper zero position for accurate weighing.

**Err-Z:** zero track range has exceeded

**A.OFF.x:** auto-off time

**CAL-Err:** calibration error


**CAL-0:** the indicator mark of calibration zero

**CAL-F:** the indicator mark of calibration full capacity

**Err-0:** overload

**Err-S:** unstable

## Programming the Auto-off Time

1. Press down the **[D]** key until the indicator displays "A.OFF.X" (X=0.1.2.3.4.5.6.7.8.9 minutes), the display value "X" is the auto-off time, when the "X" value is "0", the auto-off function is disabled. NOTE: The default factory setting is X=0
2. To change the auto-off time press the **[M]** or **[D]** key; the X value will increase or decrease by 1, press the **[T]** key to confirm the auto-off time setting.
3. To exit the auto-off timer programming, press the  key, the display will then reset.

## CALIBRATION

**Calibration is only for ADVANCED USERS or scale technicians and should only be performed if absolutely necessary.**

There are two calibration methods available: one is using standard professional calibration weights, the other is the selection of different geographic location codes (gravity mode). The following is detail:

1. Press down the **[T]** key until the indicator displays "GE.Uxx", "GE.oxx" or "GE. FAC"; a. "GE.Uxx" means: USA geographic location code "xx" is selected; b. "GE. FAC" means: Factory geographic location code is selected; c. "GE.oxx" means: Other(except for USA and Factory) geographic location code "xx" is selected.

2. Press the **[M]** or **[D]** key to change the geographic location code; please refer the geographic location code table and maps at the end of the manual.

3. After selecting the appropriate geographic location code, press the **[T]** key, the scale will store your selection and display "CAL-0" or "Go.on?"(? is flashed).

If "CAL-0" is displayed, that means the scale must be calibrated once more by using standard weights and you should proceed to the next step;

If "Go.on?" is displayed and the  key is pressed, the scale will use the selected geographic location code and reset automatically to resume normal weighing mode;

If "Go.on?" is displayed and the **[T]** key is pressed, the scale will display "CAL-0" and you should proceed to the next calibration step.

4. Remove all weights from the scale platform, press the **[T]** key, the “**0**” in “**CAL-0**” will flash
5. After the reading (0.00) becomes stable, the scale will display “**CAL-F**”; place the correct standard weight(s) on the platform (60kg standard weight for HD150, 120kg standard weight for HD300), press the **[T]** key, the “**F**” in “**CAL-F**” will flash
6. After the readings (60.00 for HD150 or 120.00 for HD300) are stable, the indicator will display “**CAL-0**”; remove the weight(s) from the platform, press the **[T]** key; the “**0**” in “**CAL-0**” will flash, and then the display will reset after 2-3 seconds

Calibration is now complete.

## GRAVITY MODE

---

The Gravity Mode feature provides a means of adjusting the scale's internal calibration factors to compensate for variations in acceleration due to gravity at different geographic locations. These differences can cause a given mass to indicate a slightly different weight at an end-users (local) site than it did at the Calibration (CAL) site.

The scale maintains two gravity setting values: one is local site gravity value; the other is calibration site gravity value. The scale will use the relationship between calibration and local gravity for its weight calculations.

We have compiled a list of local gravity values for some areas of the world. You only need select the index number of them according to the above step1 to step3. The latitude and altitude of your location both effect gravity and the calibration of your scale. It is important to select the proper code. If your location is not listed, select closest one. This kind of adjustment needs no calibration weights.


However, whenever possible, we **strongly** recommend that you calibrate the scale by using standard professional calibration weights.

## Europe Geographic Location Codes



Country	Code	Country	Code	Country	Code
<b>Albania</b>	8	<b>Greece</b>	7	<b>Russia</b>	
<b>Andorra</b>	8	<b>Holy See (Vatican City)</b>	8	Moscow & North	12
<b>Austria</b>	9	<b>Hungary</b>	9	South of Moscow	10
<b>Belarus</b>	10	<b>Iceland</b>	12	<b>Spain</b>	
<b>Belgium</b>	10	<b>Ireland</b>	10	Madrid & North	8
<b>Bosnia and Herzegovina</b>	8	<b>Italy</b>	8	South of Madrid	7
<b>Bulgaria</b>	8	<b>Latvia</b>	11	<b>Serbia and Montenegro</b>	8
<b>Croatia</b>	9	<b>Liechtenstein</b>	9	<b>Slovakia</b>	9
<b>Czech Republic</b>	9	<b>Lithuania</b>	11	<b>Slovenia</b>	9
<b>Denmark</b>	11	<b>Luxembourg</b>	9	<b>San Marino</b>	8
<b>Estonia</b>	11	<b>Macedonia</b>	8		
<b>Faroe Islands</b>	12	<b>Malta</b>	7	<b>Sweden</b>	
<b>Finland</b>	12	<b>Moldova</b>	9	North of Stockholm	12
<b>France</b>		<b>Monaco</b>	8	Stockholm & South	11
Lyon & North	9	<b>Netherlands</b>	10	<b>Switzerland</b>	9
South of Lyon	8	<b>Norway</b>	12	<b>Ukraine</b>	9
<b>Germany</b>		<b>Poland</b>	10	<b>United Kingdom</b>	
Frankfort & North	10	<b>Portugal</b>	7	North of Newcastle	11
South of Frankfort	9	<b>Romania</b>	7	Newcastle & South	10
<b>Gibraltar</b>	7				


## Canada Geographic Location Codes

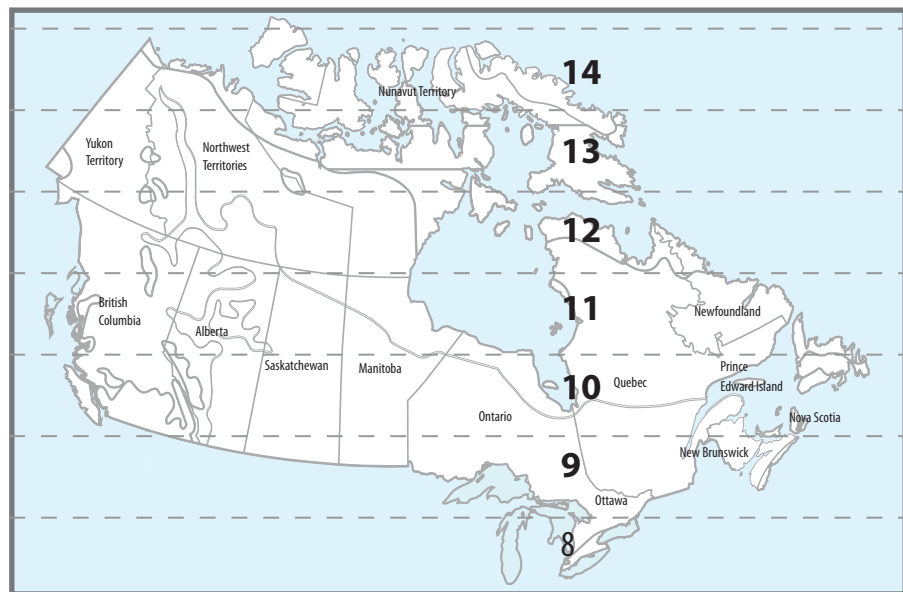

State	Code	State	Code
<b>Alberta</b>		<b>Prince Edward Island</b>	9
North of Edmonton	11	<b>Quebec</b>	
Edmonton & South	10	North of Schefferville	11
<b>British Columbia</b>		Between Schefferville & Sept-Iles	10
North of Prince George	11	Sept-Iles & South	9
Prince George & South	10	<b>Saskatchewan</b>	
<b>Manitoba</b>		North of Prince Albert	11
North of Norway House	11	Prince Albert & South	10
Norway House & South	10	<b>Northwest Territories</b>	
<b>New Brunswick</b>	9	Echo bay & North	13
<b>Newfoundland</b>		South of Echo bay	12
North of Hopedail	11	<b>Nunavut Territory</b>	
Between Hopedail & Fleur de lys	10	Victoria Island & North	14
Fleur de lys & South	9	Between Victoria Island & Baker Lake	13
<b>Nova Scotia</b>	8	South of Baker Lake	12
<b>Ontario</b>		<b>Yukon Territory</b>	
North of Nakina	10	North of Dawson	13
Nakina & South	9	Dawson & South	12

<b>Illinois</b>		<b>Pennsylvania</b>	16
Bloomington & North	16	<b>Rhode Island</b>	16
South of Bloomington	15	<b>South Carolina</b>	13
<b>Indiana</b>		<b>South Dakota</b>	17
North of Indianapolis	16	<b>Tennessee</b>	13
Indianapolis & South	15	<b>Texas</b>	
<b>Iowa</b>		Northeast of Colorado River	12
North of Des Moines	16	Southwest of Colorado River	11
Des Moines & South	15	<b>Utah</b>	13
<b>Kansas</b>	15	<b>Vermont</b>	17
<b>Kentucky</b>	14	<b>Virginia</b>	14
<b>Louisiana</b>	12	<b>Washington. DC</b>	15
<b>Maine</b>	18	<b>Washington State</b>	18
<b>Maryland</b>	15	<b>West Virginia</b>	15
<b>Massachusetts</b>	17	<b>Wisconsin</b>	
<b>Michigan</b>		Green Bay & North	18
Northwest of Lake Michigan	17	South of Green Bay	17
Southeast of Lake Michigan	16	<b>Wyoming</b>	
<b>Minnesota</b>	18	North of Casper	15
		Casper & South	14

## USA Geographic Location Codes

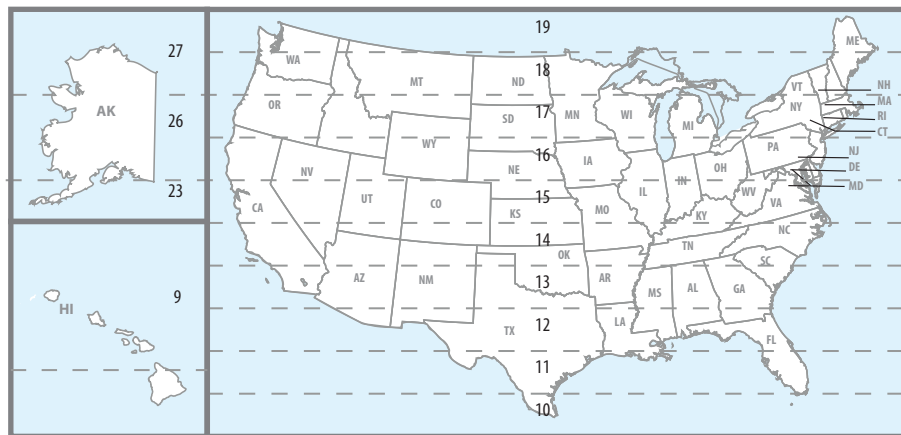

## CONNECTING THE HD-300 SCALE VIA USB

---


1. Connect the HD-300 scale to an available USB port on your computer.
2. Power on the scale.

## SETTING UP THE HD-300 FOR USE WITH THE UPS WORLDSHIP SOFTWARE - USA/CANADA ONLY


---

**\*\* Please note this function will not work in Europe\*\***

1. Open the UPS Worldship software and click on “tools”.

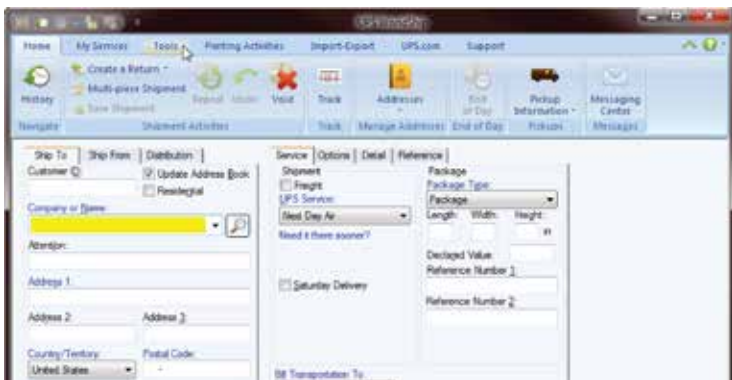


2. Click on “System Preferences”.

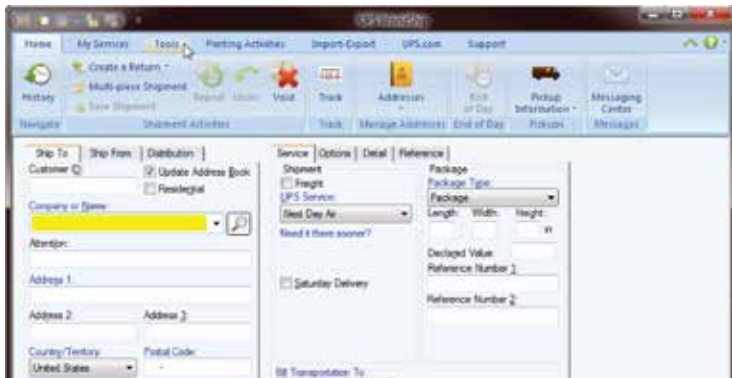





3. Click on **“Hardware”** in the drop-down menu.

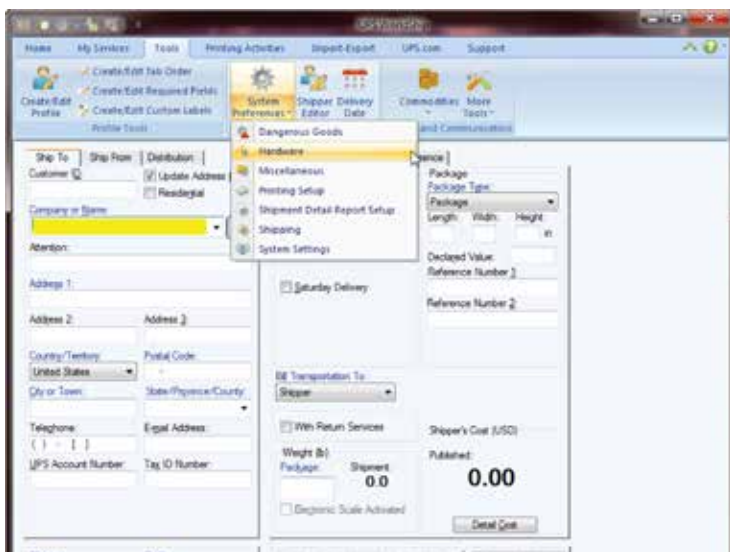


4. Click on **“Scale Port”** drop-down menu and choose **“USB”**.

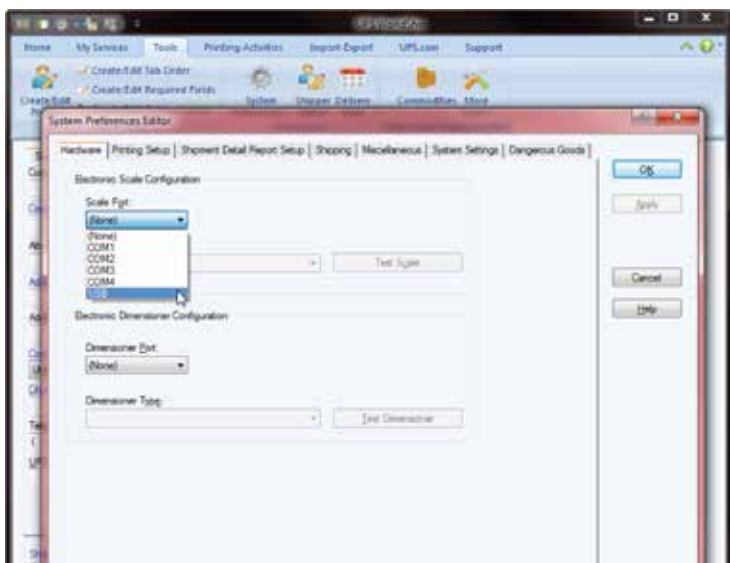


5. Click on **"Scale Type"** drop-down menu and choose **"Toledo PS60-5155 150lb Flat Top"**.

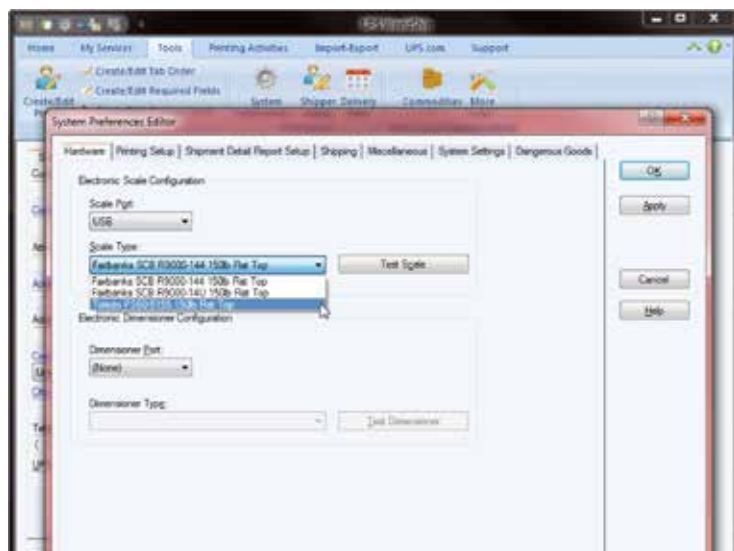


6. Click the **"Test Scale"** button.

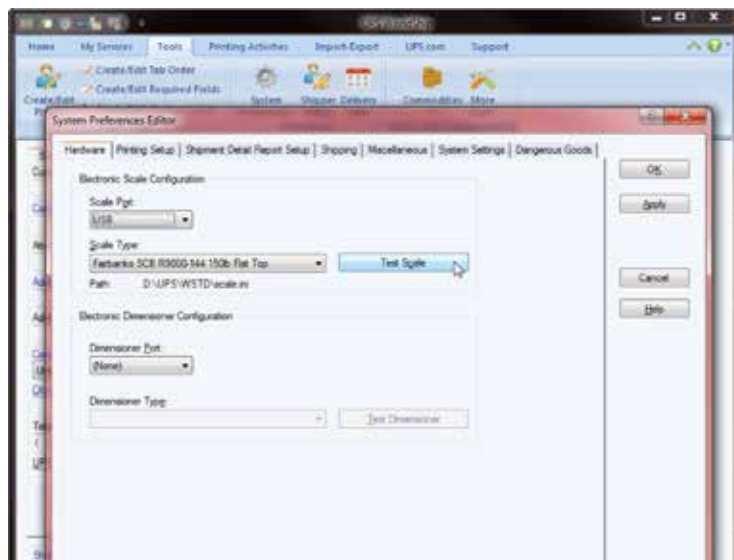


7. As you place an item on the scale, you will see the weight displayed in the “**weight**” field. After you have verified that the scale is displaying weight, click “**OK**” to exit this screen. On the next screen, click “**OK**” again to exit to the main screen.

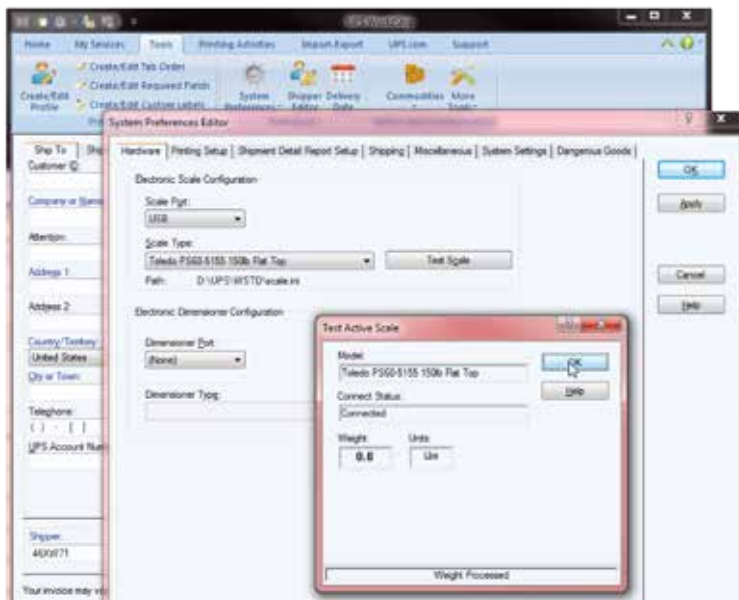


8. Finally, ensure that the box next to “Electronic Scale Activated” is checked. Your scale is now set up and ready to use.

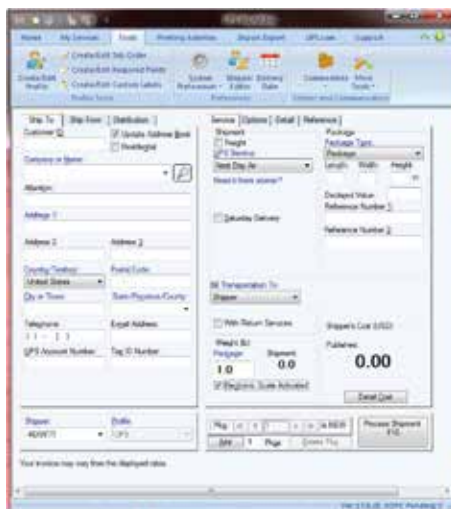

**Fig1: Bottom view of the scale**

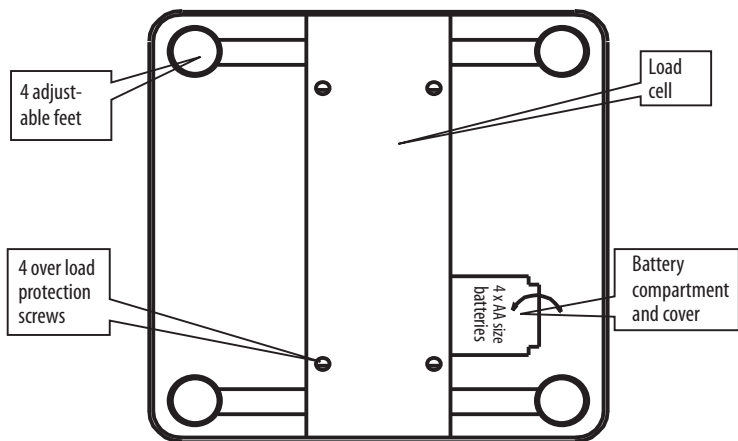

**Fig 2: Indicator's outline and placement positioning**

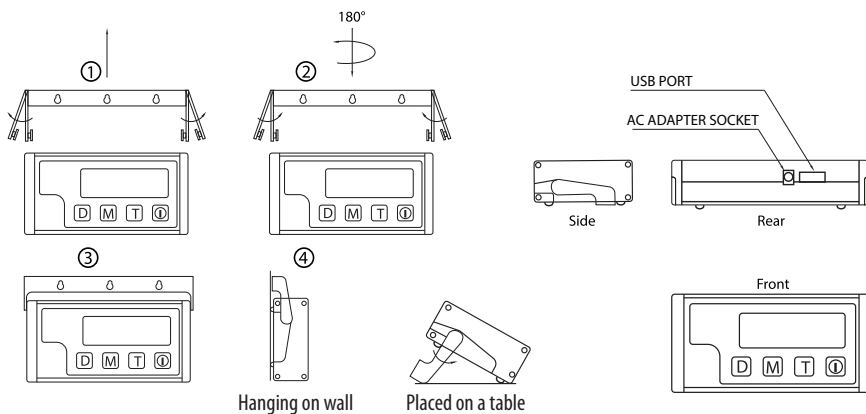

## SPECIFICATIONS

Model	HD150	HD300
Capacity	68kg/150lb	136kg/300lb
Accuracy	0.02kg/0.05lb	0.05kg/0.1lb
Units	lb, kg	
Platform dimension	355.5 x 355.5 x 63.5mm (14" x 14" x 2.5")	
Display dimension	165 x 82.5mm (6.5" x 3.25")	
Scale Weight	3.4kg	
Operating temperature	Optimum 10-40°C (50-104°F)	
Power Source	6.0V / 100 mA AC Power adaptor / 4 x AA Batteries	



www.myweigh.com